




AMERICAN SOLAR



Sr,No.	Pump Capacity HP	Voltage	Head in MTR	Discharge LPM	Motor Size	Pump Size	Delivery Size
1	3	1 ϕ -230V AC	30	250	4"	4"	2"
2	3	1 ϕ -230V AC	50	220	4"	4"	2"
3	3	1 ϕ -230V AC	70	120	4"	4"	2"
4	5	3 ϕ -380V AC	30	575	6"	6"	2.5"
5	5	3 ϕ -380V AC	50	470	6"	6"	2.5"
6	5	3 ϕ -380V AC	75	280	6"	6"	2.5"
8	7.5	3 ϕ -380V AC	30	500	6"	6"	2.5"
9	7.5	3 ϕ -380V AC	50	440	6"	6"	2.5"
10	7.5	3 ϕ -380V AC	70	350	6"	6"	2.5"
11	7.5	3 ϕ -380V AC	90	220	6"	6"	2.5"
12	10	3 ϕ -380V AC	30	600	6"	6"	2.5"
13	10	3 ϕ -380V AC	50	565	6"	6"	2.5"
14	10	3 ϕ -380V AC	70	470	6"	6"	2.5"
15	10	3 ϕ -380V AC	100	290	6"	6"	2.5"

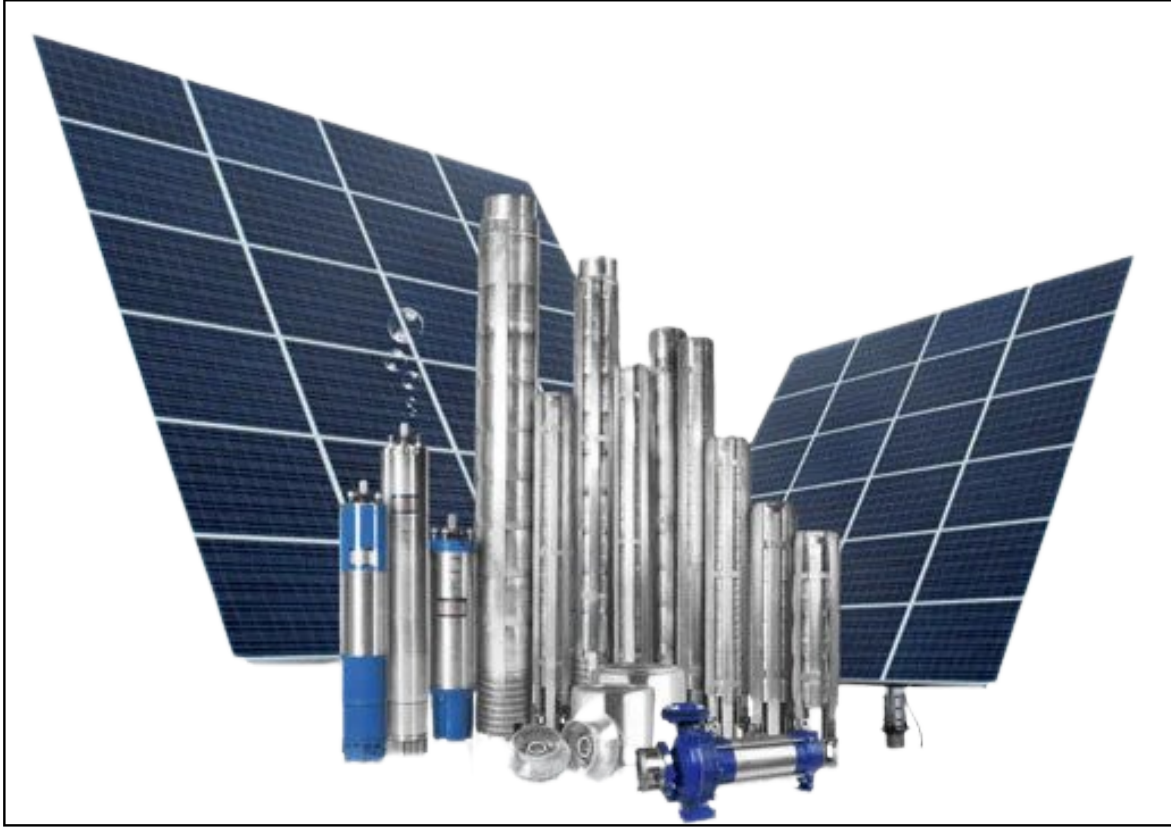

AMERICAN SOLAR

www.americansolarusa.us

info@americansolar.us